

A stylized graphic of a blue wave with a white spiral in the center, set against a white background. The wave is composed of several layers of blue, with a darker blue at the bottom and lighter blue at the top. The spiral is white and is located in the upper right portion of the wave.

GBI
Pool Services Inc.

Liner Installations



Introduction:

Thank you for the opportunity to provide you with information regarding our liner installation services. This book will go over the major steps in the liner installation process.

**All photos are from previous jobs completed by GBI Pool Services Inc.*

Liner Manufacturers:



What is a liner?

- Custom made vinyl that covers the concrete floor and steel walls
- Prevents water from seeping into the ground around pool structure
- Available in a variety of patterns and thicknesses for all pools:
 1. 20MIL thickness for above-ground pools
 2. 30MIL thickness for in-ground pools
 3. 40MIL thickness for extra heavy duty requirements (40% extra material charge over 30MIL)

The Process: Draining Pool

- Measuring a pool is faster when the pool is empty, however it can be done if the pool is full and the water is clear
- Liner is removed and placed in commercial garbage bags for disposal by customer
- GBI Pool Services Inc. can dispose of the liner for an extra charge




The Process: Pool Structure Inspection

- Once the pool is empty, the structure of the pool is thoroughly inspected for issues
- If extensive repairs are required, an extra estimate will be prepared before work continues
- Most pools do not require extra repair work



The Process: Pool Measurement

- GBI Pool Services Inc. uses computer software to measure the pool perfectly after one site visit
- 50% deposit is due on the date of measurement to ensure ordering can take place as soon as it is approved by the manufacturer

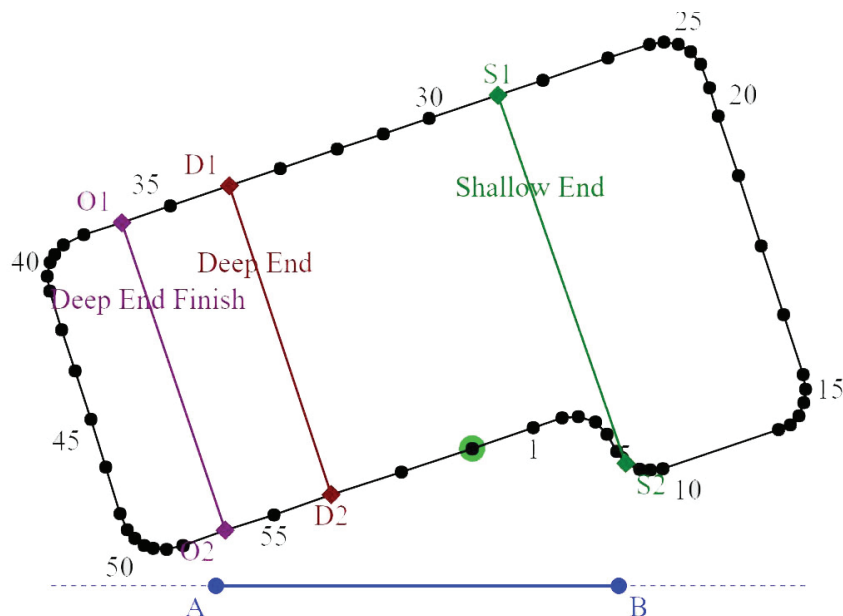

The Process: Pool Structure Repair

- Repairs are done in order to make sure the surface under the liner is smooth and to help prevent future issues
- Corrosion is grinded off of metal walls, and covered with rust proof paint
- The concrete floor is repaired with hydraulic cement and smoothed over



The Process: Preparing for Installation

- On the day of the liner installation, the bottom and sides of the pool must be perfectly cleaned out to make sure nothing gets trapped under the new liner
- Bottom drain is cemented over to comply with local laws and prevent entrapment
- Once the pool has been inspected by the on-site supervisor, installation of the liner can commence



The Process: Liner Installation

- Liner is installed with a crew of at least 3 people
- Plywood sheet with a bead track is used to ensure perfect fit at fiberglass stairs
- Water is not added until liner can be installed wrinkle-free
- Water trucks are coordinated by GBI Pool Services Inc.





Why Choose GBI Pool Services?

- We are owned and operated by accredited engineers
- We are a small, locally owned business that emphasizes personalized service
- We offer competitive pricing
- We source all of their liners from Canadian vinyl companies
- We are fully insured
- We are well connected within the industry to supply you with any of your backyard needs
- We have completed over 100 successful liner installations in the past three years
- We are experienced in pool renovations and updating backyards
- We specialize in leak detection and liner installations - you won't have a leaking liner once we are finished!

Before:



After:



Before:



After:



Before:



After:



A stylized graphic of a blue wave with a white spiral in the center, set against a white background. The wave is composed of several layers of blue, with a darker blue at the bottom and lighter blue at the top. The spiral is white with a light blue outline.

GBI

Pool Services Inc.

Email: info@gbiservices.ca
Phone: (613) 277-5523